

NOTES:





Rated Current: 7.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Sn Over Ni
 Insulator Material: PA9T+30%G.F UL94V-0 BK

Ordering Information

IC25-12 XX SN S 175 01

No. of Pins per ROW: 02-20PIN
 Contact Plating: SN=TiN
 Insulator: 175=17.5

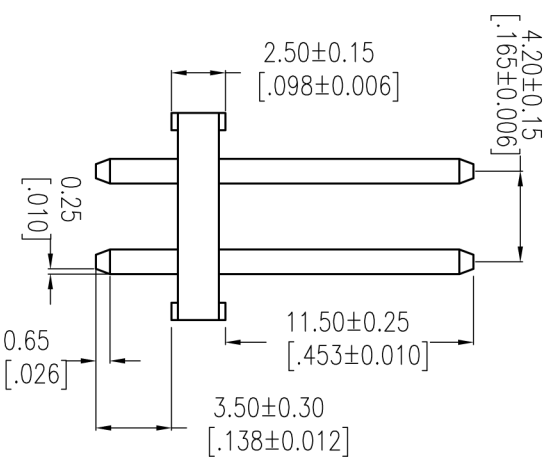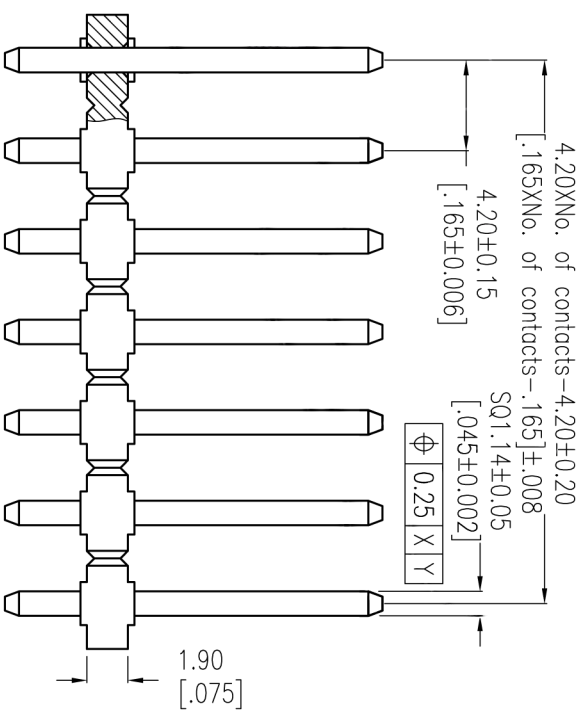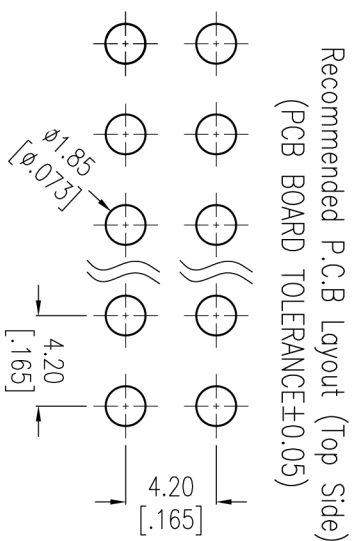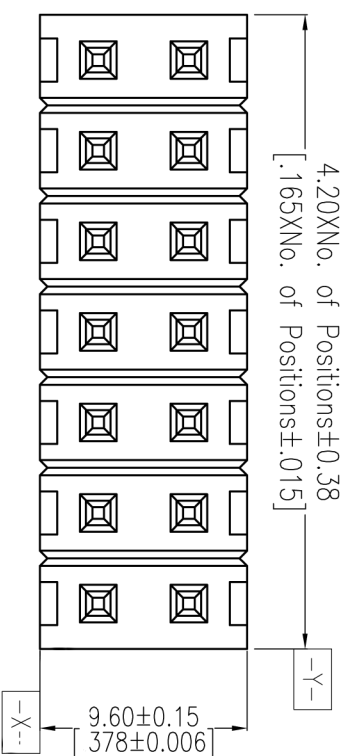

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	上海回峰电子科技有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd. 电话: 021-67150229 传真: 021-67150251 企业邮箱: huiheng_dzjk@163.com 公司网站: www.huiheng-china.com
A0	2014/08/05	NEW		XX ±0.40	Chen. CHECK	2014/08/05	UNIT mm		1C25-12XXXXXS17501	
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: Pitch 4.2mm Pin Header 180° H=2.5 W=9.6 DIP=3.5	
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.	
				Angle ± 3°			PROJ.			
				DIM TOL						