



NOTES:



Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information



1115-11 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length Packing
 02-40 G0=Gold Flash L=A+B+D+2.7 0=PE Bag
 G3=10u"Gold Standard:129=12.9 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Item	Pin Length	A	D	B	Mating
Standard	12.90	3.00	1.20	6.00	2171 2185
Alternate					

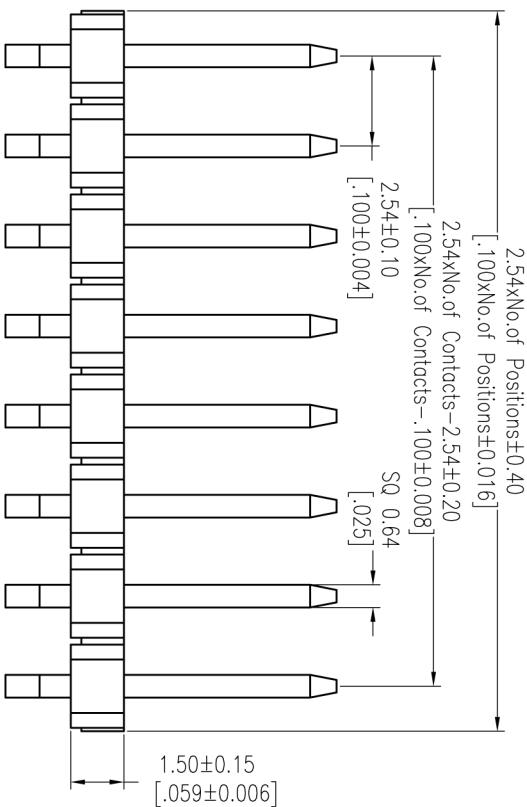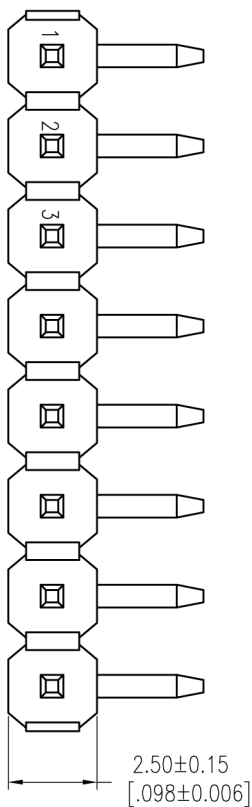

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

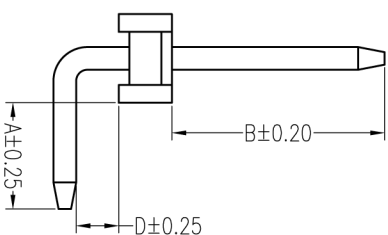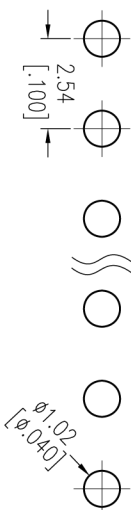

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A0	2012/05/02	NEW	-----	XX ±0.40	<i>William Qiao</i> CHECK	2012 05 02	mm	A4	1115-11XXXXXXXXXX
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE	DATE	SHEET 1/1	PROJ.	TITLE: PH2.54 SINGLE ROW 90° H=1.5 CONCAVE BENDING Customer NO.



上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.
 电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com