



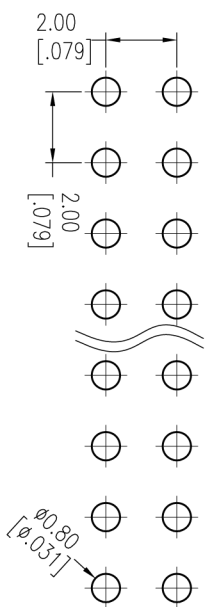

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G:F UL94V-0 BK


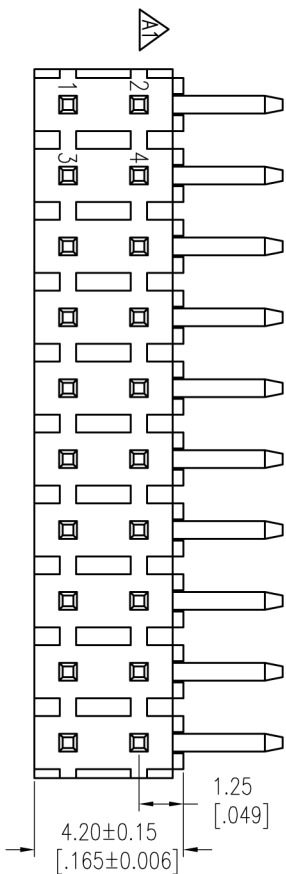


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

1240-12 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length(Short) Packing
 Per Row:02-40 G0=Gold Flash L=A+B+2.7 0=PE Bag
 G3=10u"Gold Standard:095=9,5 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

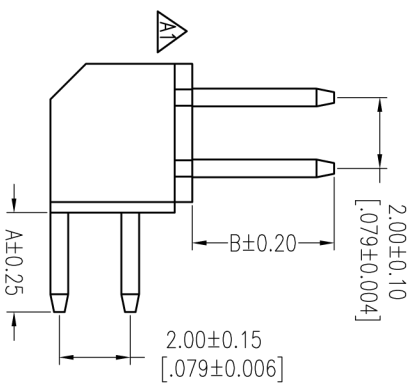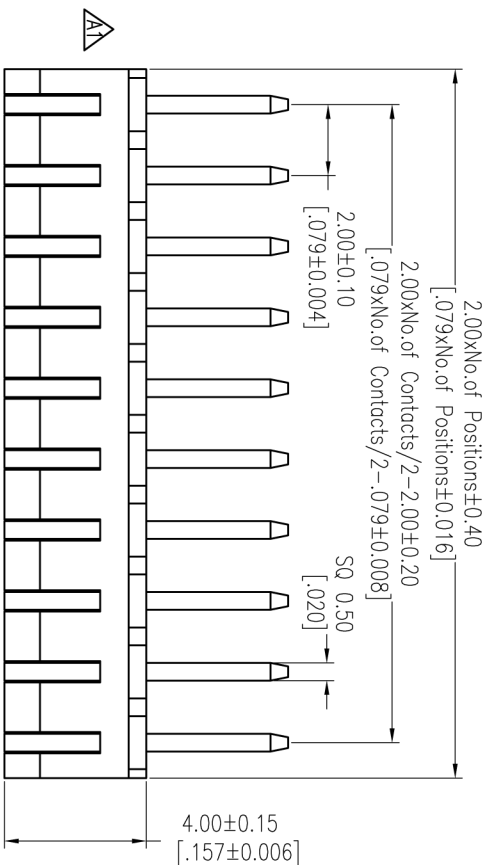

Item	Pin Length	A	B	Mating
Standard	9.50	2.80	4.00	2249 2250
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2014/01/16	Modify drawing	△	XX ±0.40	Wang	2014/01/16	mm	A4	1240-12XXXXXXX
A0	2012/04/26	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	PH2.00 DUAL ROW 90° H=4.0
				Angle ± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
				DIM TOL			PROJ.		



上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzki@163.com
 公司网站: www.huifeng-china.com