



NOTES:


Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information


1220-11 XX XX Z XXX X 1

No.of Pins Contact Plating Pin Length Packing
 02~40 G0=Gold Flash L=A+B+2.2 A=Tube
 G3=10u"Gold Standard;069=6.9 T=Tube
 G4=15u"Gold 080=8.0 P=Tube+CAP
 G5=30u"Gold 090=9.0 R=Tube&Reel+CAP
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin



Item	Pin Length	A	B	Mating
	6.90	2.80	1.90	
Standard	8.00	2.80	3.00	
	9.00	2.80	4.00	2240 2243 2263 2272
Alternate				

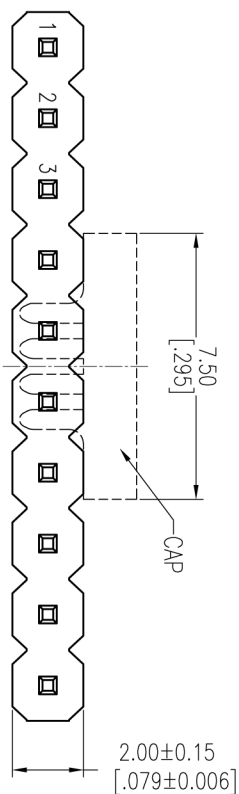


Dual Numbers

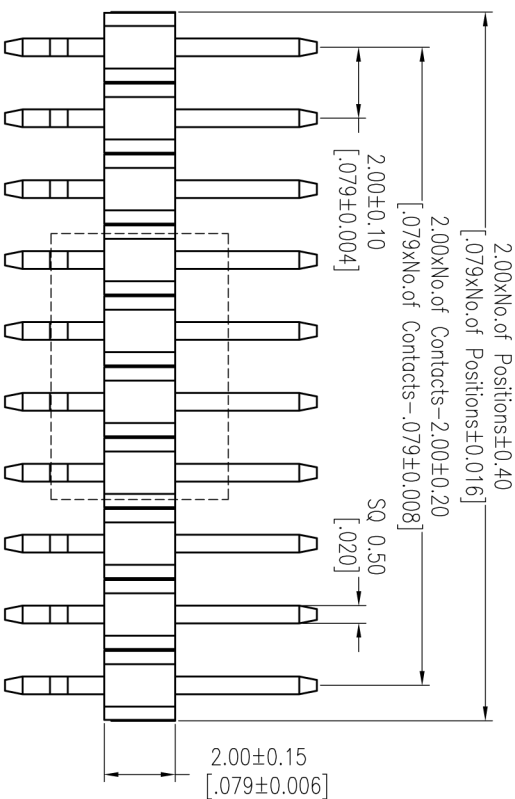

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

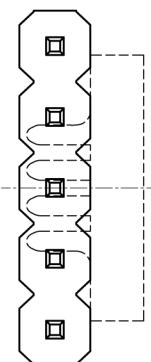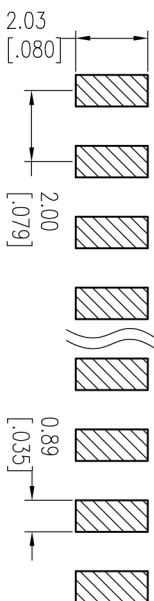

Odd Number

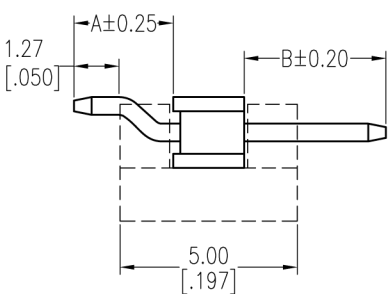

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A0	2012/04/26	NEW	-----	XX ±0.40	<i>William Gao</i> CHECK	2012.04.26	mm	A4	1220-11XXXXXX
			-----	X.XXX ±0.15	CHECK	DATE	SIZE	A4	PH2.00 SINGLE ROW 90° SMT H=2.0
			-----	Angle ± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
			-----	DIM TOL			PROJ.		



上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.
 电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com