



NOTES:

Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C



Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK

# Ordering Information



## 1220-11 XX XX U XXX X 1

No.of Pins    Contact Plating    Pin Length    Packing  
 02-40    G0=Gold Flash    L=W+2A±1.5    0=PE Bag  
 G3=10u"Gold    Standard:    T=Tube  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Item	Pin Length	W	A	D
Standard	---	---	---	0.75
Alternate				

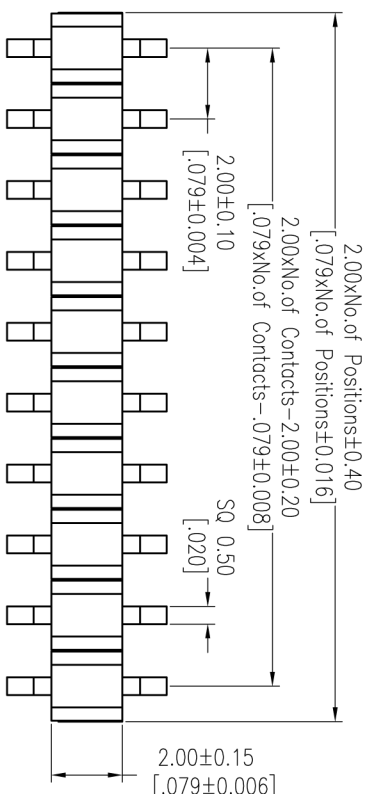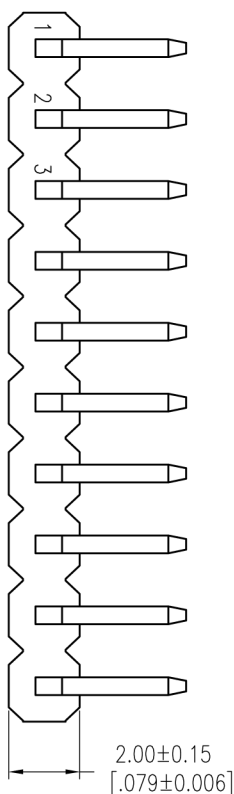

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

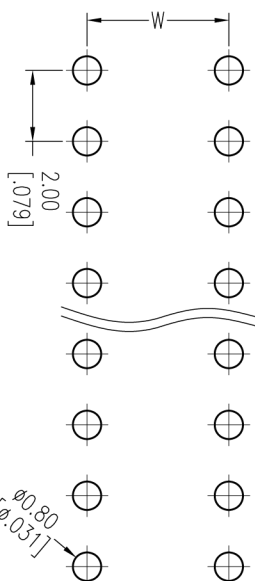

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	<i>William Gao</i>		2012.04.26	mm	1220-11XXXXX0XXXXX	TITLE: PH2.00 SINGLE ROW 90° H=2.0 U-TYPE		
XX	±0.25	CHECK		DATE	A4		Customer NO.		
X.XXX	±0.15	ANGLE	APPROVE	DATE	SHEET				
-----		± 3'			1/1				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				
A0	2012/04/26	NEW							
1									



上海回峰电子科技有限公司

Shanghai Hui Feng Electronic Technology Co., Ltd.  
 电话: 021-67150229  
 传真: 021-67150251  
 电子邮箱: huiheng\_dzki@163.com  
 公司网站: www.huiheng-china.com