

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2157-2XXSXXCYN A 1





No. of Pins per ROW: 52=40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packaging:
 T=Tube
 A=Tray

S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

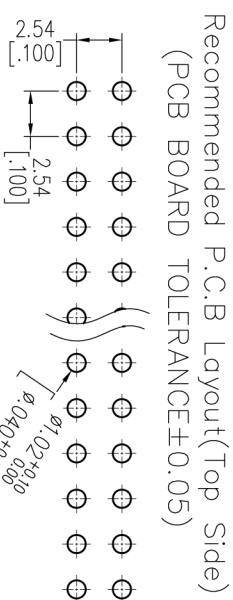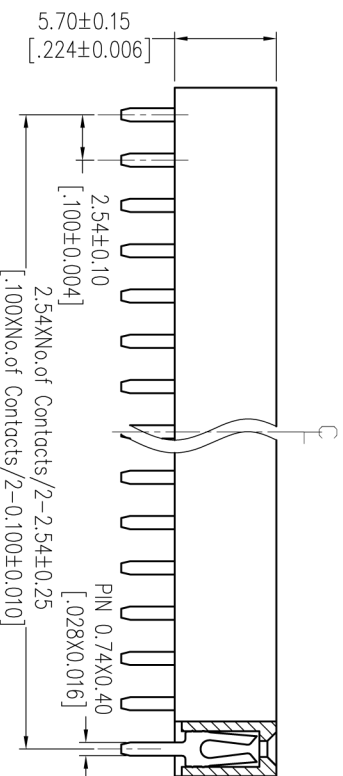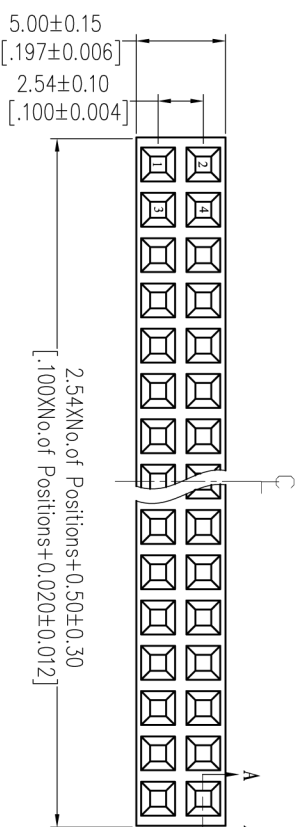

SECTION: A-A

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYhuang		2012/08/10	mm	2157-2XXSXXCYNX1			
XX	±0.25	CHECK		DATE	A4	TITLE: FH2.54 DUAL ROW 180° DIP H=5.7			
XXXX	±0.15				1/1	Customer NO.			
Angle	± 3°	APPROVE		DATE					
DIM	TOL	CHANGE							
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012/08/10	NEW							

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com