



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%GF UL94V-0

Ordering Information




2344-2 XX C XX CUN T 4

No. of Pins per Row: 02-50Pin

Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin

Packing:
T=Tube

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131/3133/3100/3131B
Alternate		

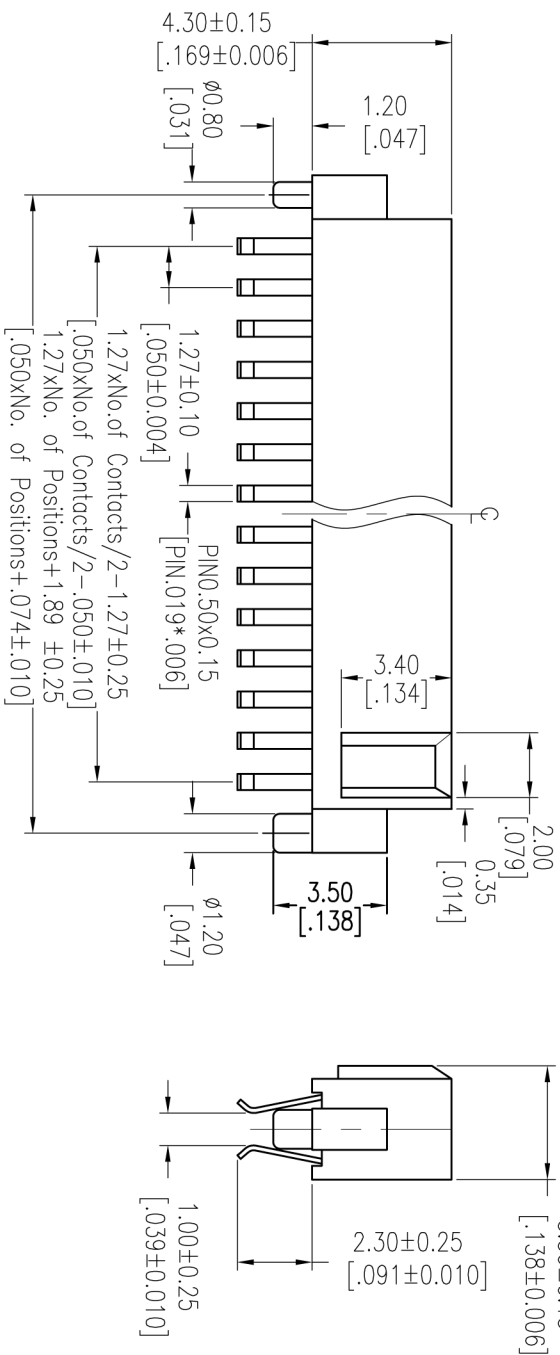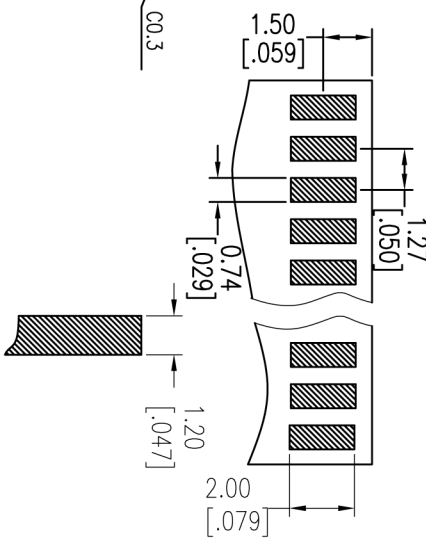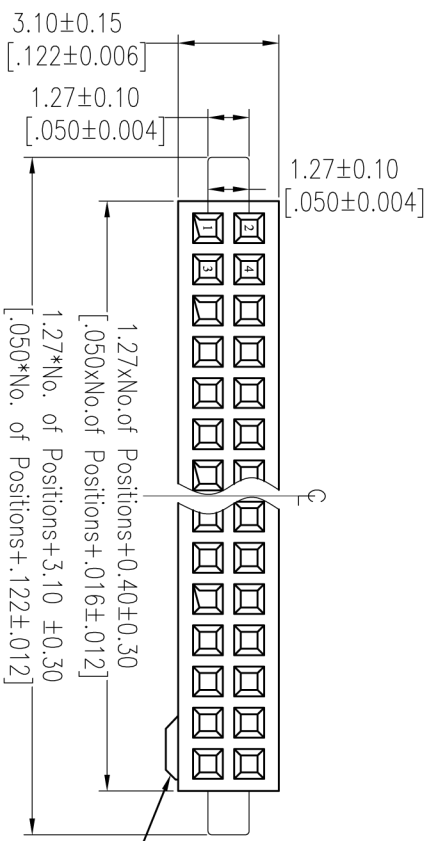

SECTION A-A

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX ±0.40	Tang	2012/12/13	UNIT	mm	2344-2XXCXCUN T4
XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH 1.27mm DUAL Split H=4.30 WITH DIFFERENT POST AND BUMP
X.XXX ±0.15	ANGLE	DATE	SHEET	1/1	Customer NO.
-----	APPROVE	DATE	PROJ.		
CHANGE	DIM	TOL			
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/12/13	NEW			
1					



上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话: 021-67150229
传真: 021-67150251
企业邮箱: hui Feng_dzki@163.com
公司网站: www.huifeng-china.com