

HSHF

NOTES:

Current Rating: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0






Ordering Information

2293P - 4 XX S XX C Y N X 1

No. of Pins per ROW: 52=40PIN
 Contact Plating: G0=Gold Flash
 G1=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 H3=Matting, 10μ"Gold
 H4=Matting, 15μ"Gold
 Tail 3μ"Gold

Insulator: C=PA9T
 Packing: T=Tube
 O=PE bag

Item	Pitch	Matting
Standard	2.00	1215/1220
Alternate		

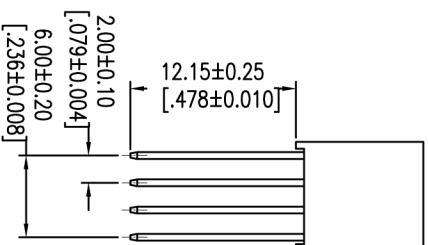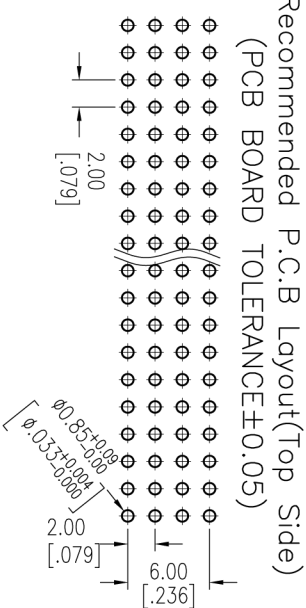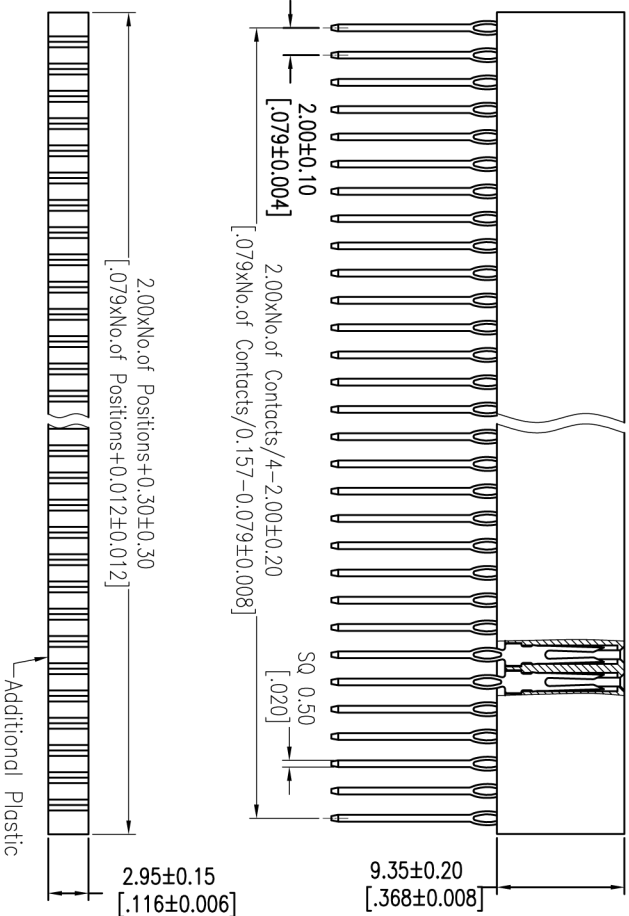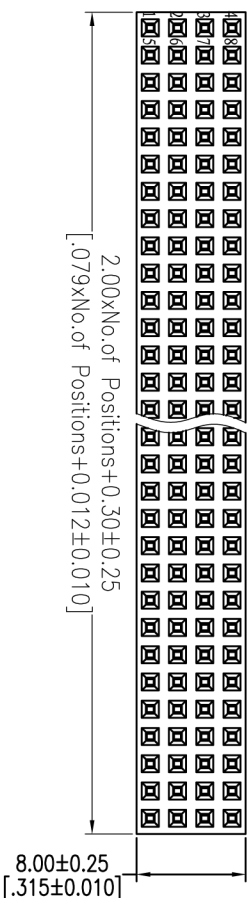

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2014/02/09	Modify drawing		XX	Wang	2014/02/09	mm		2293P-4XXSXXCYNX1
A0	2012/07/28	NEW		XX	CHECK		A4		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	PROJ.	TITLE:
				± 3'			1/1		PH2.00 FOUR ROW (PCI04) 180° H=9.35 PRESS FIT + ADDITIONAL PLASTIC
				DIM	TOL				Customer NO.

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com