

HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 500VRMS
 Mechanical Life: Min 500 cycles
 Mating Pin: $\varnothing 0.38$ to $\varnothing 0.50$ mm
 Forces: (polished steel gauge $\varnothing 0.41$ mm)
 Insertion: 150g Max/Pin, Withdrawal: 30g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(6 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+ 30%G.F(UL94V-0)

Ordering Information




3524-382 XX S XX 060 X 1

No. of Pin
 2-50PIN

Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tim

Packing
 A=Tray
 T=Tube

Item	Pitch	Mating
Standard	1.27	3514
Alternate		

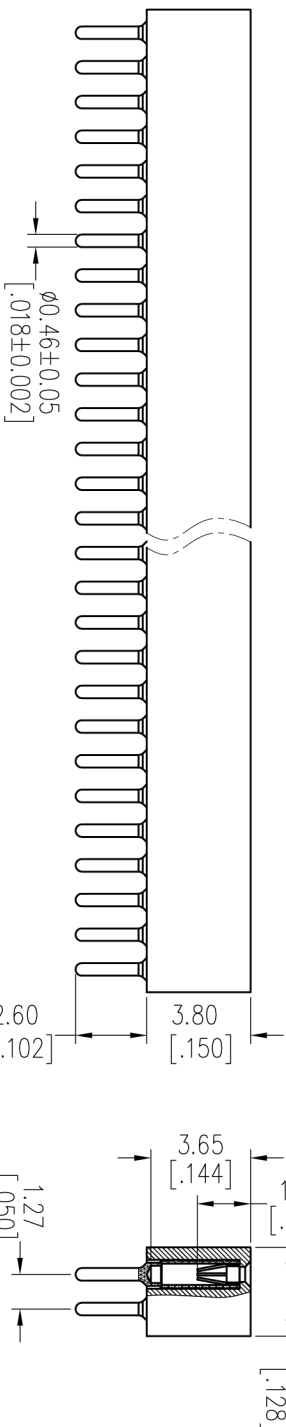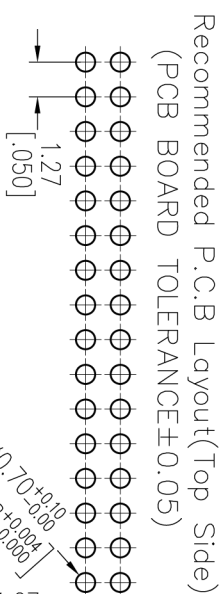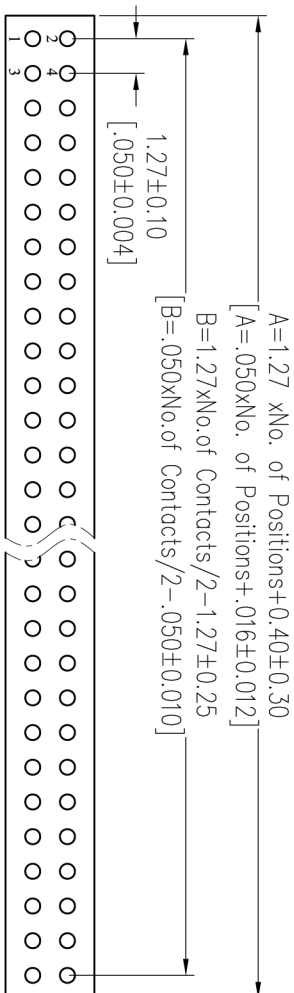

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/16	NEW	-----	XX	JYhuang	2012/10/16	mm	A4	3524-382XXSXX060X1
				XXX	CHECK	DATE	SIZE	SHEET	TITLE:
				Angle	APPROVE	DATE	A4	1/1	1.27mm MACHINED FEMALE HEADER
				± 3'			PROJ.		DUAL ROW 180° Pin Length 6.0mm
				DIM TOL					Customer NO.

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com