
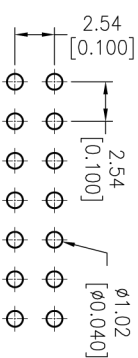


HSEF


NOTES:

- Rated Current:3.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40℃ to +105℃
- Housing Material:PA9T+30%GF(UL94V-0)
- Latch Material:PA9T+30%GF(UL94V-0)
- Contact Material:Brass
- Contact plating:Au or Sn over Ni Plated
- Fixed Axle Material:Brass
- Fixed Axle plating:Ni Plated

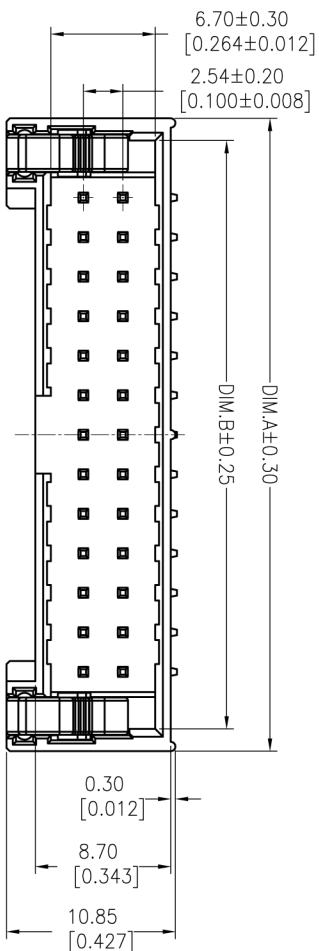

Recommended P. C. B Layout (Top Side)

(PCB BOARD TOLERANCE ± 0.05)




3D VIEW(REF.)
SCALE 1:2

Ordering Information

3212-XX S XX B X X 1

- No. of Pins: 10 34
- Contact Plating: B=Black
- Insulator Color: L=Long Latch, S=Short Latch
- Latch Type: L=Long Latch, S=Short Latch
- Packing: T=Tube, A=Tray
- 14 40 S0=Gold Flash/Tin
- 16 50 S1=3μ"Gold/Tin
- 20 60 S2=5μ"Gold/Tin
- 26 64 S3=10μ"Gold/Tin
- 30 S4=15μ"Gold/Tin
- SS=30μ"Gold/Tin

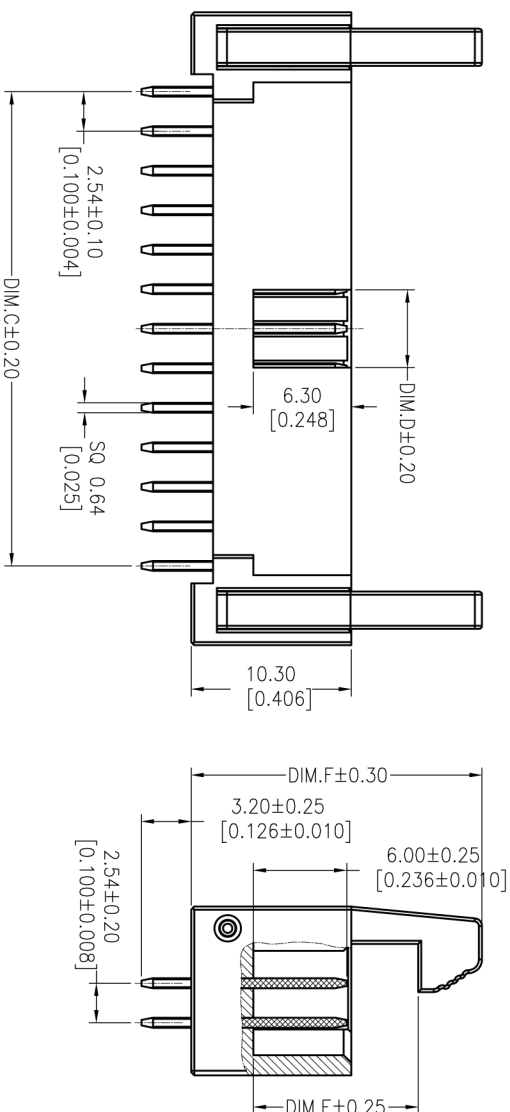

PART NO.	DIM.E	DIM.F
3212-XXSXXBLX1	14.60	22.10
3212-XXSXXBSX1	10.60	18.70

No. Of POSITION	DIM.A	DIM.B	DIM.C	DIM.D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	3.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

hf 上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229
传真: 021-67150251
企业邮箱: huiheng_dzki@163.com
公司网站: www.huiheng-china.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2013/10/24	NEW		XX ±0.40	Tsingnsn	2013/10/24	mm inch	A4	3212-XXSXXBXX1
				XX ±0.25	CHECK	DATE	SHEET	1/1	TITLE: 2.54mm EJECTOR HEADER 180° DIP TYPE
				X.XXX ±0.15	APPROVE	DATE	PROJ.		Customer NO.
				Angle ± 3°					