

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze/Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5310-XX B XX B 01

No. of Pins	Contact Material	Contact Plating	Color	Insulator
06 30	S0=Gold Flash/Ni	B=Black		
08 34	B=Brass	S3=10u"Gold/Ni	G=Grey(427C)	
10 36	P=Phosphor Bronze	S4=15u"Gold/Ni	E=Grey(413C)	
14 40		S5=30u"Gold/Ni		
16 50		SN=Tin		
20 60		SM=Matte Tin		
24 64				
26				

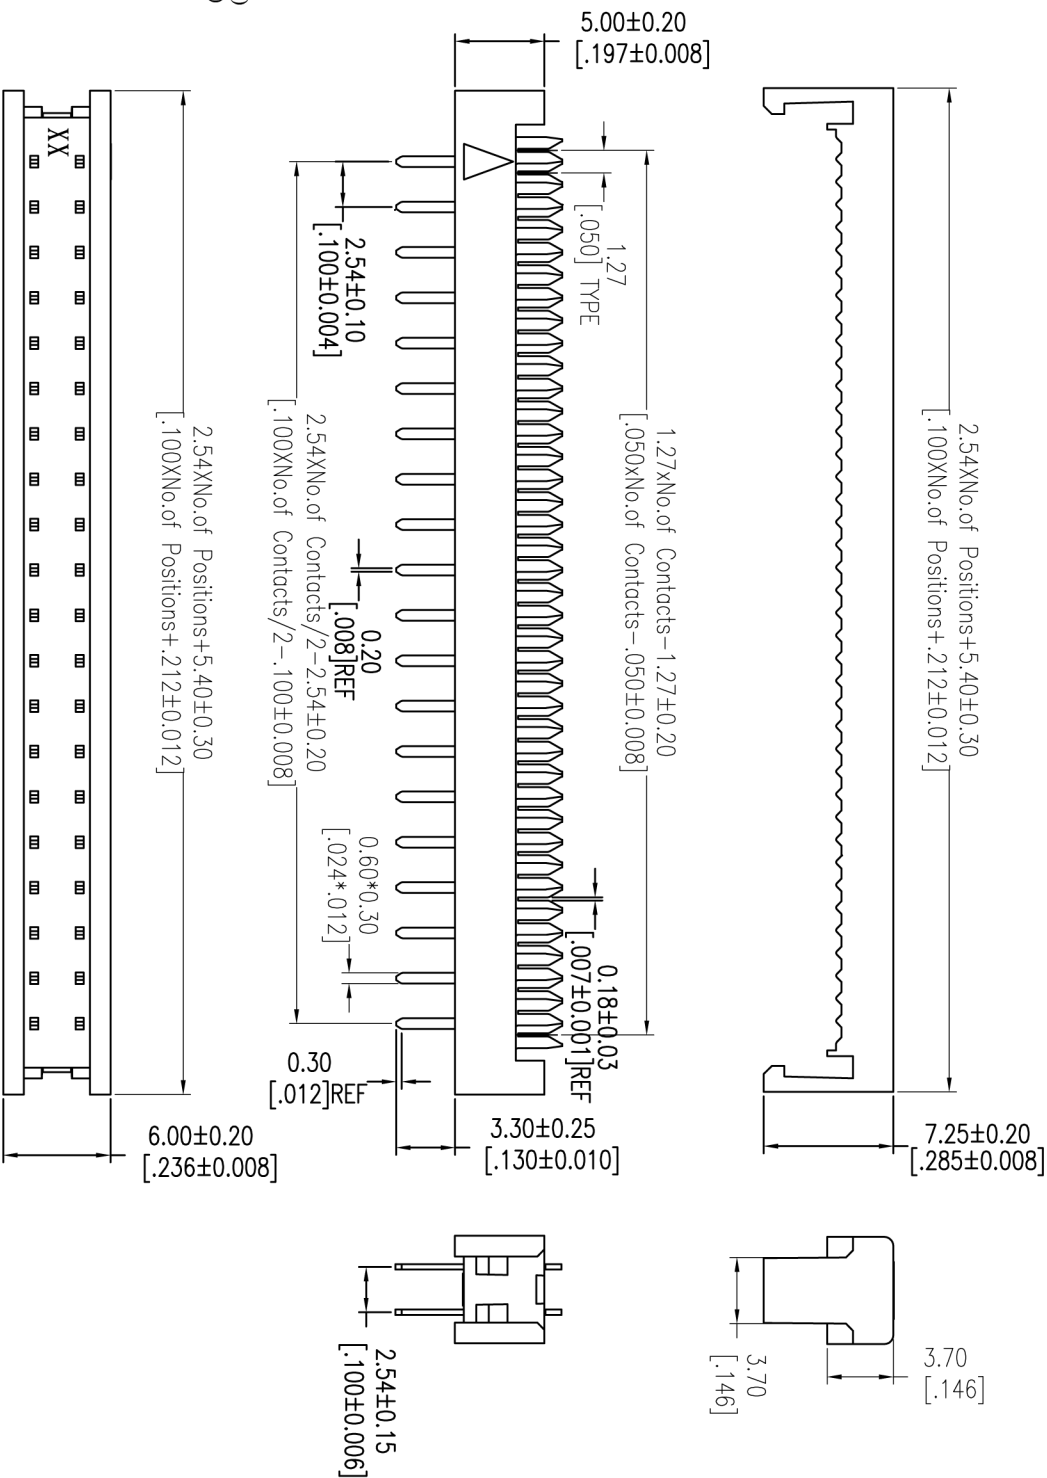

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 7.2)	Customer NO.
A0	2012/10/09	NEW	-----	XX	JYhuang	2012/10/09	mm	A4	5310-XXXXXB01		
				X.XX	CHECK	DATE	SIZE	SHEET			
				X.XXX	± 0.15	DATE	1/1				
				Angle	± 3'	DATE	PROJ.				
				DIM	TOL	DATE					
				APPROVE		DATE					

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com