

HSF




NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+15%G.F UL94V-0

Ordering Information

3900-XX MI SN AN T 02

No. of Pins Contact Plating Packing
 04P 12P SN=7in T=Tube
 06P 14P
 08P 16P
 10P 18P
 20P

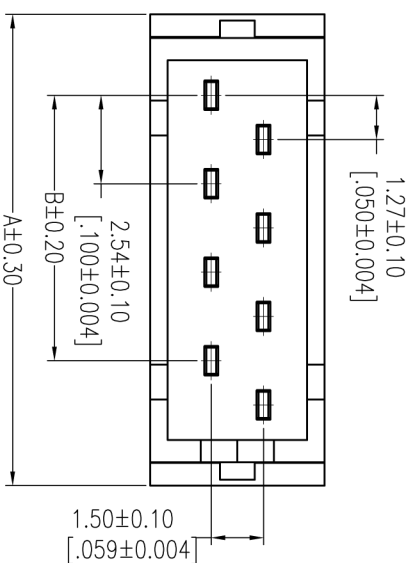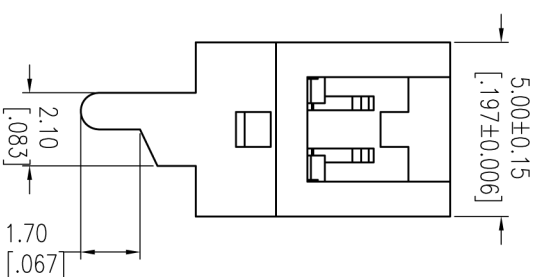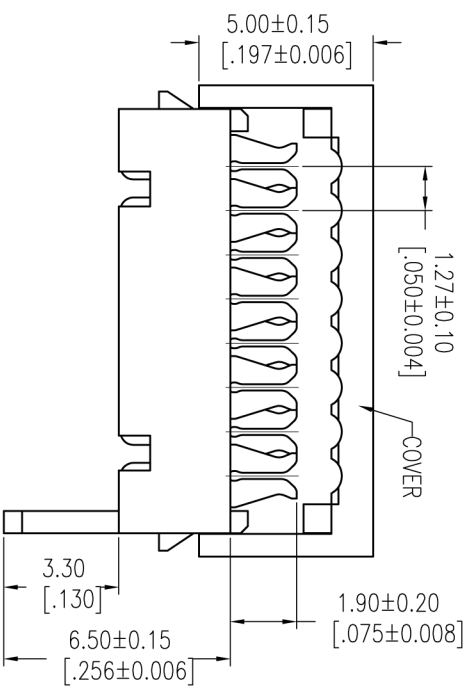

Dimension & Ordering Information

Circuit	Part No.	Dimension		Q'ty /Tube
		A	B	
04	3900-04MISNANT02	8.45	2.54	68pcs
06	3900-06MISNANT02	10.99	5.08	52pcs
08	3900-08MISNANT02	13.53	7.62	42pcs
10	3900-10MISNANT02	16.07	10.16	36pcs
12	3900-12MISNANT02	18.61	12.70	31pcs
14	3900-14MISNANT02	21.15	15.24	27pcs
16	3900-16MISNANT02	23.69	17.78	24pcs
18	3900-18MISNANT02	26.23	20.32	22pcs
20	3900-20MISNANT02	28.77	22.86	20pcs

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYhuang	2014/05/28	UNIT	mm
XX	CHECK	DATE	SIZE	A4
X.XXX	±0.15	DATE	SHEET	1/1
Angle	± 3'	APPROVE	PROJ.	
DIM	TOL			

PART NO. SEE TABLE
 TITLE: Mini Match Box Header IDC type

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2014/05/28	Micro Match --Mini Match	-----
A0	2012/10/12	NEW	-----

1 2 3 4 5 6 7 8 9 10