

HSF

TECHNICAL SPECS:





Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 100 cycles
 Mating Pin: φ0.40 to φ0.56mm
 Forces: (polished steel gauge φ0.43mm)
 Insertion: 200g Max/Pin, Withdrawal: 60g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(4 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar

Ordering Information

7110-301 XX M XX 042 X 1

Row of Pitch No. of Pin Contact Plating Packing
 l=7.62mm Sec tab S0=Gold Flash/Tin T=Tube
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

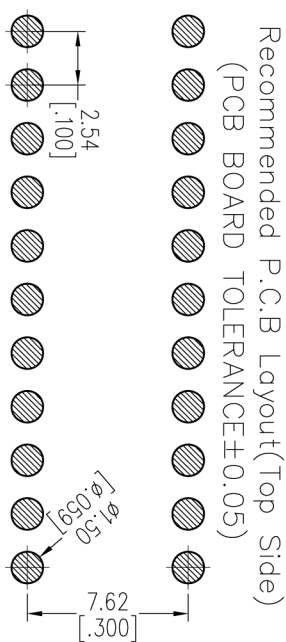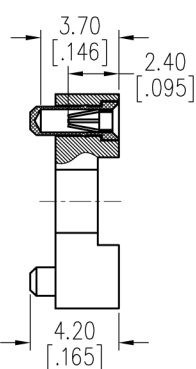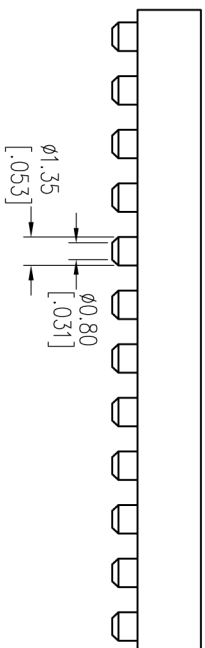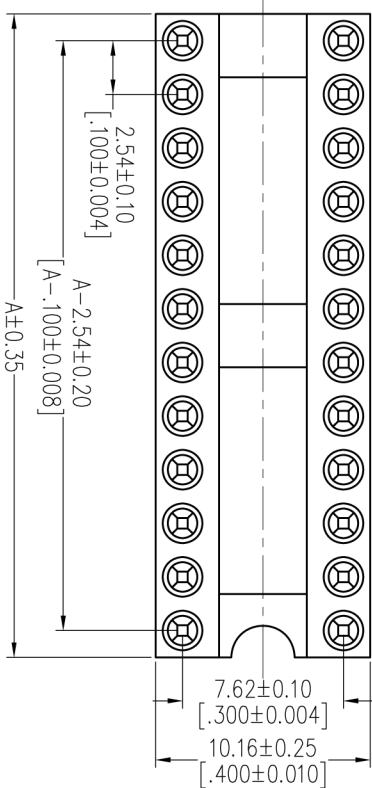

Dimensional & Ordering Information

Poles	Part No.	Dim A
06	7110-30106MXX042X1	7.62
08	7110-30108MXX042X1	10.16
10	7110-30110MXX042X1	12.70
14	7110-30114MXX042X1	17.78
16	7110-30116MXX042X1	20.32
18	7110-30118MXX042X1	22.86
20	7110-30120MXX042X1	25.40
22	7110-30122MXX042X1	27.94
24	7110-30124MXX042X1	30.48
28	7110-30128MXX042X1	35.56

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX ±0.40	JYhuang	2012/11/02	UNIT	mm	7110-301XXMXX042X1
XXX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm IC SOCKET SMT H=3.0 L=4.2 Row of Pitch 7.62mm
XXXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzki@163.com
 公司网站: www.huifeng-china.com