

HSF






NOTES:

- Rated Current:3.0~9.0 AMP.
- Contact Resistance:20mΩ Max.
- Withstand Voltage:500V AC
- Insulation Resistance:1000MΩ Min.
- Operation Temperature:-40℃ to +105℃
- Applicable Wire Range:
 - Solid Wire: AWG #20~#18
 - Strand Wire: AWG #20~#18
- Contact Material:Phosphor Bronze(C5191)
- Contact Plating: Sn over Ni
- Main Body Material: LCP

Ordering Information

L401 - X - XX Z 400 X X 01

- No. of Pins
- 1: 1Pin
- 2: 2Pin
- 3: 3Pin
- Plating
- SMT: SMT
- SM: Mame Tin
- Type
- Z: 90° SMT
- W: White
- Insulator Colour
- T: Tube
- R: Tube & Real
- Package

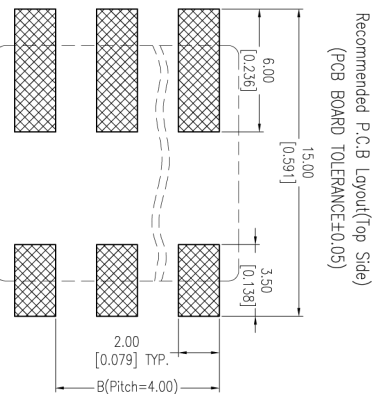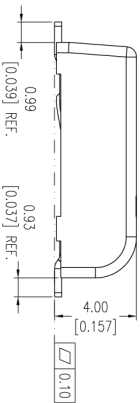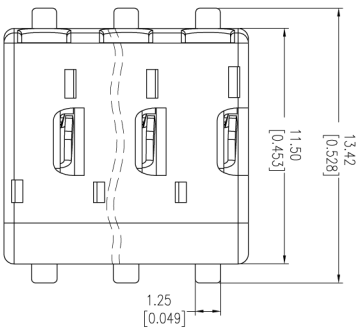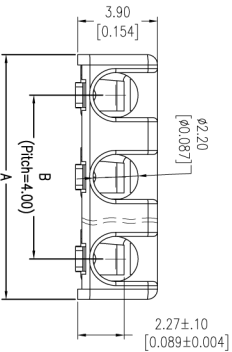

3	11.95	8.00
2	7.90	4.00
1	3.95	/

PIN	A	B
-----	---	---

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ± 3°

DM

TOL

DRAW

Allen

CHECK

DATE

DATE

DATE

PART NO.

L401-X-XXZ400XX01

TITLE:

4.0Pitch LED CONN.

H=4.00 90° SMT

Customer NO.

HSF 上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229

传真: 021-67150251

企业邮箱: huifeng_dzf@163.com
公司网站: www.huifeng-china.com

REV DATE MODIFICATION DESCRIPTION CHANGE DIM

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----