HSF

NOTES:
Rated Current:3.0~9.0 AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃
Applicable Wire Range:
- Solid Wire: AWG #20~#18
- Strand Wire: AWG #20~#18

Contact Material:Phosphor Bronze(C5191)
Contact Plating: Sn over Ni
Main Body Material: LCP

Ordering Information

L401 - X - XX Z 400 X X 01

- No.of Pins: 1: 1Pin; 2: 2Pin; 3: 3Pin
- Plating: SM: Matte Tin
- Type: Z: 90° SMT
- Insulator Colour: W:White
- Package: T: Tube; R: Tape & Reel

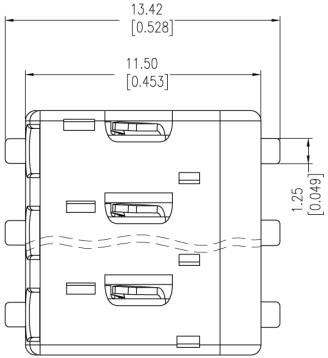

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

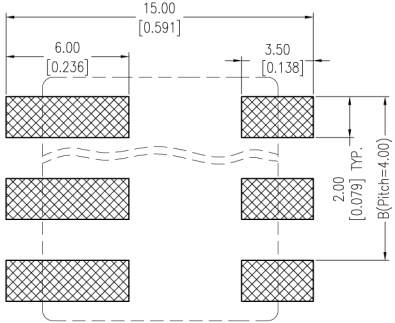

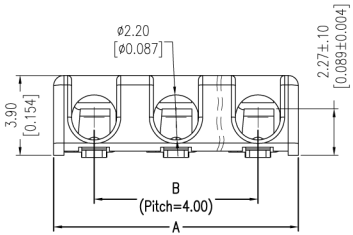

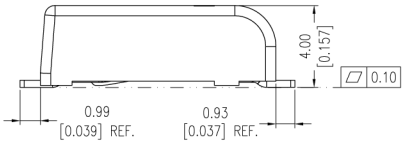



3	11.95	8.00
2	7.90	4.00
1	3.95	/
PIN	A	B

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2015/09/22	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Allen	DATE	2015/09/22
CHECK		DATE	
APPROVE		DATE	

SCALE	Fit
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. L401-X-XXZ400XX01

TITLE: 4.0Pitch LED CONN. H=4.00 90° SMT

Customer NO.

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com