HSF

IDC HOUSING MATERIAL
Insulation Material:PBT+30%GF(UL94V-0)
Contact Material:Phosphor Bronze/Brass
Contact plating:Au or Sn Over Ni

SPECIFICATIONS
Insulation Resistance:5MΩ Min
Contact Resistance:1.0Ω Max
Withstand Voltage:DC 300V, 10S
The Cable Assembly Must 100% Test

CABLE MATERIAL
Insulation:UL 2651,Grey Red Side
Conductor:28AWG(7/0.12mm)
Electrical:300V

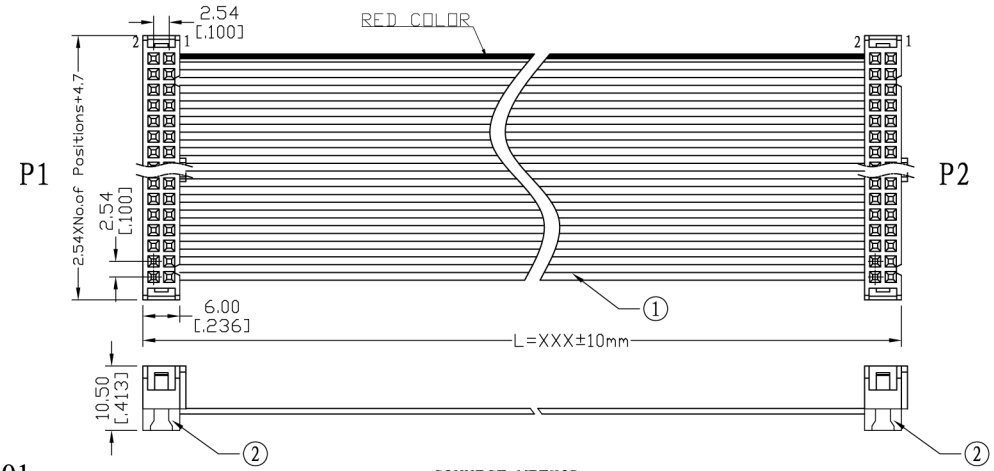

Ordering Information

FA12 - xx xx A A x xxx - 01

- No.OF Pins: 04~64p
- Contact Plating:
  - G0=Gold Flash
  - G3=10u"Gold
  - G4=15u"Gold
  - G5=30u"Gold
  - S0=Gold Flash/Ni
  - S3=10u"Gold/Ni
  - S4=15u"Gold/Ni
  - S5=30u"Gold/Ni
  - SN=Tin
- Connector Direction: A=Same Direction
- Connector Color: B=Black, G=Grey 427C
- Length of Line(mm)

CONNECT METHOD

P1	P2
1	1
2	2
3	3
4	4
XX	XX
XX	XX

NO.	PART NO.	NAME	TITLE	QT'Y	UNIT
②	5212-XXYXXXXBX01	CONN.	2.54 IDC **P PBT Black material:XX, Plating Xu" gold	2	SET
①	F1U-C28GXXD0-XXXX-1	WIRE	UL2651 PH1.27mm XXP 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/09/02	NEW		

OPERATION				
X.X	±0.40	DRAW	BEN	09/09/02
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

上海回峰电子科技有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com

PART NO.	FA12 - xxxxAAxxxx- 01
TITLE:	2.54 IDC Drawing
Customer NO.	