

HSF

IDC HOUSING MATERIAL


Insulation Material: PBT+30%GF(Ul94V-0)
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 1.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL

Insulation: UL 2651, Grey, Red, Side
 Conductor: 28AWG(7/0.12mm)
 Electrical: 300V

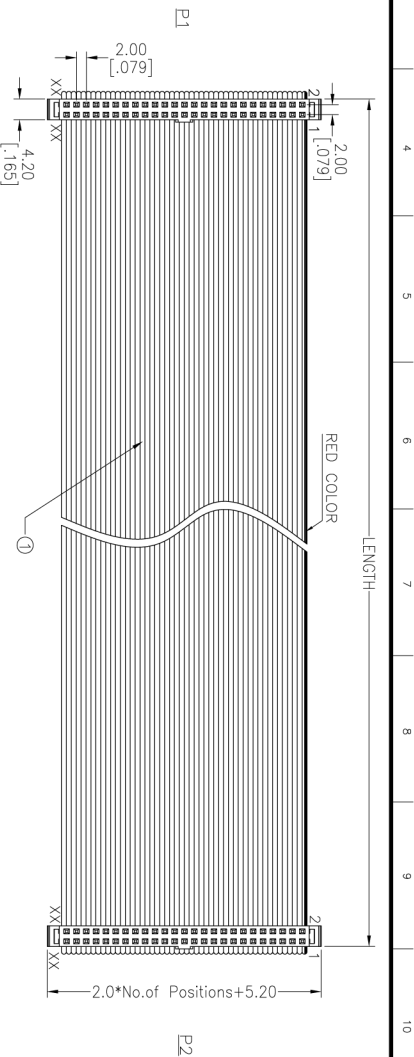

Ordering Information

FA22 - XX XX A A B XXX - 02

No. of Pins
 04-64p
 Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Ti

Connector Direction
 A=Same Direction

Connector Color
 B=Black
 Length of Line(mm)

CONNECT METHOD

- P1
 Color
 1 Red
 2 Grey
 3 Grey
- P2
 1
 2
 3

XX Grey XX

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± 1.1%

NO.	PART NO.	OPERATION	DRAW	BEN	SCALE	UNIT	FILE	TITLE	QTY	UNIT
③	G5220-XXDB01	SR	SR	2.00	**P	Black			2	PCS
②	5222-XXXPXXXB01	CONN.	CONN.	2.00	IDC **P	PBT Black	Phosphor Bronze *U	gold With Bump	2	PCS
①	F1U-B28CGXD0-XXXX-1	WIRE	UL2651	P#1.0mm **P	28AWG(7/0.12T)	PVC Grey	Marking Red	Side	XXX	MM

上海回率电子科技有限公司
 Shanghai Huirate Electronics Technology Co., Ltd.
 地址: 021-67150229
 邮编: 201302
 电话: 021-67150229
 传真: 021-67150229
 邮箱: huirate@163.com
 网址: www.huirate-china.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE	APPROVE	PROJ.	Customer NO.
AO	11/07/29	NEW				FA22-XXXXABXXX-02