


HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Withstand Voltage: 1000V AC/DC
 Mechanical Life: Min 100 cycles
 Connecting Pin: $\phi 0.47\text{mm}$
 Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F UL94V-0
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar

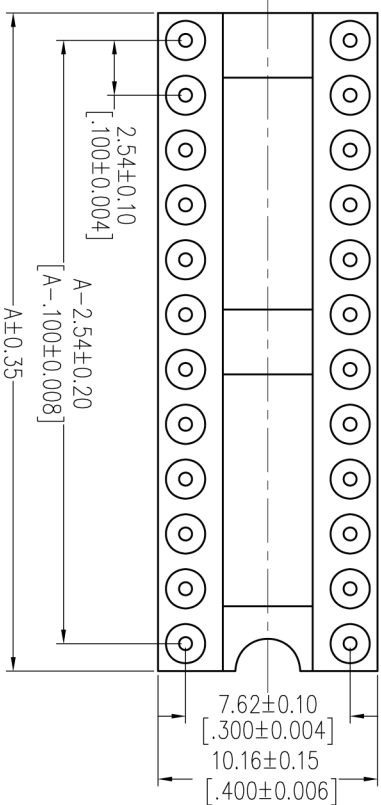


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)



Ordering Information

3560-301 XXX S XX 100 X 1

Row of Pitch No. of Pin Contact Plating Packing
 I=7.62mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold G4=15u"Gold A=Tray
 G5=30u"Gold

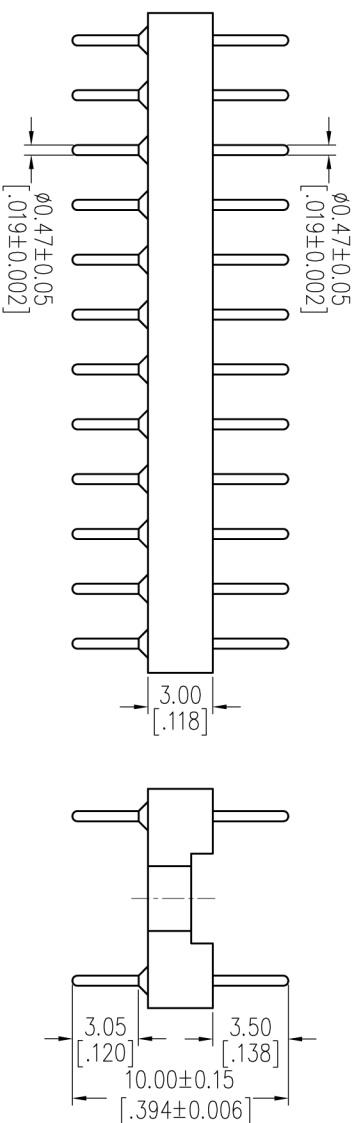

Dimensional & Ordering Information

NO.of Poles	Part No.	Dim A
06	3560-30106SXX100X1	7.62
08	3560-30108SXX100X1	10.16
10	3560-30110SXX100X1	12.70
12	3560-30112SXX100X1	15.24
14	3560-30114SXX100X1	17.78
16	3560-30116SXX100X1	20.32
18	3560-30118SXX100X1	22.86
20	3560-30120SXX100X1	25.40
22	3560-30122SXX100X1	27.94
24	3560-30124SXX100X1	30.48
28	3560-30128SXX100X1	35.56

OPERATION XX ± 0.40
 DRAW JYhuang
 DATE 2012/11/05
 SCALE UNIT mm
 FIT A4
 SHEET 1/1
 PROJ.

PART NO. SEE TAB
 TITLE: MACHINED ADAPTER CONNECTOR
 2.54mm H=3.0 L=10.0 Row of Pitch 7.62
 180°

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzj@163.com
 公司网站: www.huifeng-china.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/05	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
XX ± 0.40	JYhuang	2012/11/05	UNIT mm	A4
XXX ± 0.25	CHECK	DATE	SIZE A4	SHEET 1/1
XXXX ± 0.15	APPROVE	DATE	PROJ.	

ANGLE	TOL
$\pm 3^{\circ}$	

CHANGE	DIM	TOL

DATE	DATE

DATE	DATE