

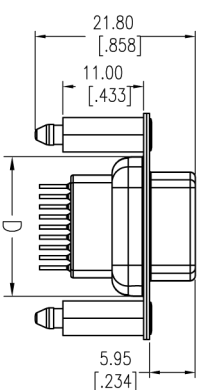


HSP

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55℃ to +105℃

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell: Cold Roller Steel, Ni Plated
 Nut: Brass, Sn Over Ni Plated

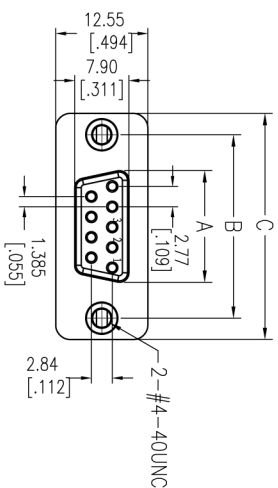


6222A-XXFYXXB01

6222A-XXFBXXB01


Ordering Information

6222A-XX F X XX B 01

No. of Pins: 09,15,25,37P
 Type: Y=With Back Fork, B=With Back Nut, F=With Front Nut, N=Without Fork, H=With Back Fork With Screw
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Insulator Color: B:Black, U:Blue

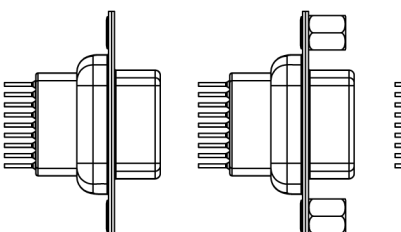


6222A-XXFFXXB01



6222A-XXFHXXB01

6222A-XXFNXXB01

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



6222A-XXFYXXB01

6222A-XXFBXXB01

6222A-XXFFXXB01

6222A-XXFHXXB01

6222A-XXFNXXB01

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.65
25	38.38	47.04	53.04	41.30
37	54.84	63.50	69.32	57.44

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzki@163.com
 公司网站: www.huifeng-china.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A0	2012/12/04	NEW	-----	XX	JYhuang	2012/12/04	mm	A4	6222A-XXFXXXB01	D-SUB FEMALE DUAL ROW 180° DIP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	ANGLE	APPROVE	DATE	SHEET	PROJ.	CUSTOMER NO.	
				± 3°			1/1			